




Sentinel Door Controls, LLC

Phone 1.800.327.7848
Fax 1.888.412.3667

sales@sentineldoor.com
estimating@sentineldoor.com
www.sentineldoor.com

Architectural
Hinges

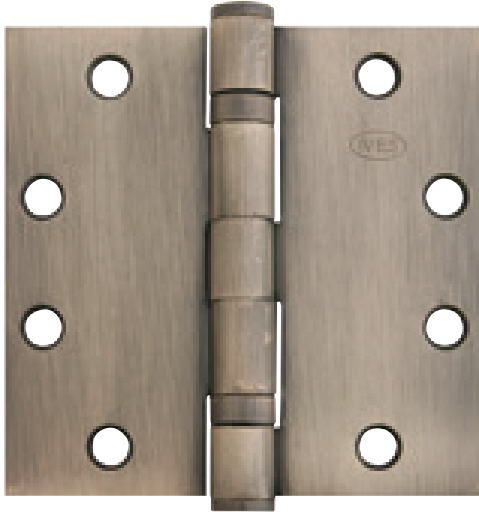

CS4545BBNRP32D

5 Knuckle, ball bearing full mortise hinge

- Recommended for medium weight doors (<150 lbs)
- Recommended for medium frequency usage (<400 cycles per day)
- Made with two ball bearing assemblies
- Recommended for use with a door closer
- Packed with fasteners for hollow metal and wood doors

12-24 x 1/2 UFPHMS, 12 x 1 1/4 FPHWS

Certifications

- Certified to ANSI/BHMA A156.1 for performance standards
- Meets ANSI/BHMA 156.7 for template hinge dimensions
- UL Classified for windstorm rated assemblies - R37965
- UL Listed, 3 hour fire doors

Options

- NRPNon-removable pin

Material substrate

- Made from 1040 steel, or 304 series stainless steel

Height x Width	Size (mm)	Gauge
4.5 x 4.5	114 x 114	0.134

<u>BHMA</u>	<u>Description</u>	<u>Substrate</u>	<u>Finish</u>
630	Satin stainless	Stainless steel	US32D