

5000 Series

Grade 1 / Adjustable Surface Mount Closer

Standard Features


- Non-handed, 9-1/16" x 3/4" Hole Pattern
- 2-1/8" (54mm) projection
- Available Finishes Painted Aluminum & Dark Bronze
- Adjustable Latch, Sweep, & Back Check
- Tri-Packed Regular, Top Jamb and PA Mountings
- Adjustable Sizes Available 1-4 and 3-6
- Set Sizes Available: 3, 4 and 5
- **10-year manufacturer's limited Warranty**
- **Weight: 5.73 lbs per unit**
- **Weight: 57.30 lbs per case (10 count)**



Specifications


- All 5000 Series closers have cast aluminum bodies with high compression steel springs and hardened rack and pinions for doors opening 180 degree maximum.
- The 5014 closer has an adjustable spring power from size 1 thru 4, complying with 5 lb. interior and 8½ lb exterior barrier-free opening force restrictions.
- The 5036 closer is adjustable from size 3 thru 6, providing an excellent closer for use in external door applications. The 5000 closer is also available in fixed size 3, 4 and 5 spring tension.
- The closers feature body and arm assemblies that are corrosion resistant and can be installed in regular, top jamb and parallel arm applications.
- ANSI/BHMA A156.4, Grade 1 certified
- UL listed 55H5

Installation

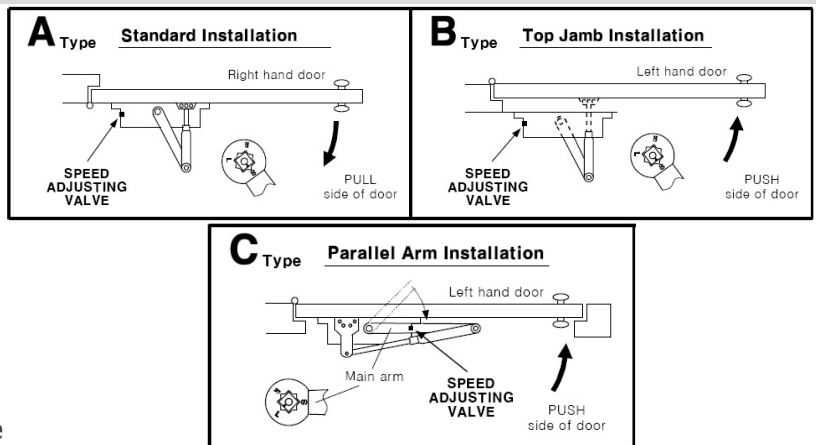


Available Options & Accessories

- Top Jamb & PAB Mounting Plates
- Hold Open Arms & Brackets

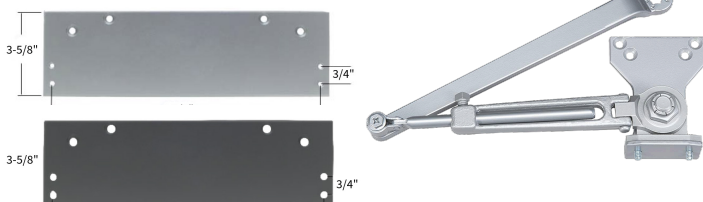

Technical Drawings

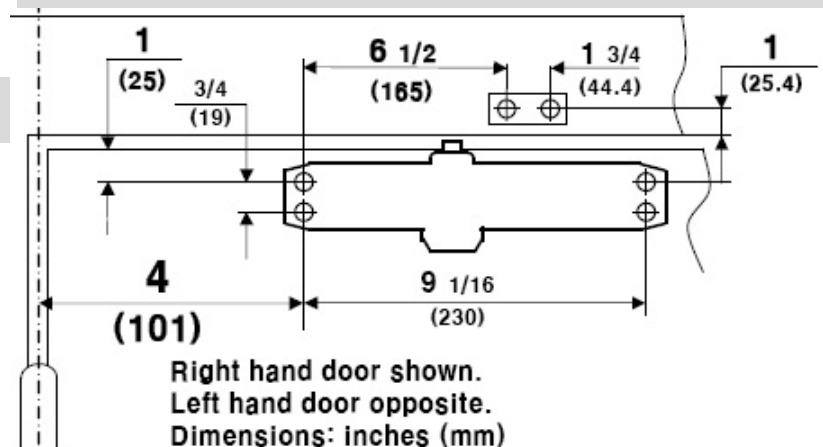

SENTINEL DOOR CONTROLS

TEL 800.327.7848 FAX 888.412.3667 www.sentineldoor.com sales@sentineldoor.com