

# SERIES M9900 - EXIT DEVICE

## RIM MOUNT



MARKS#	FUNCTION
M9900	Rim Panic
M9900F	Fire Rated Rim Panic
M9900 - 48	Rim Panic - 48"
M9900F - 48	Fire Rated Rim Panic - 48"


OPTIONS	
M9900	33" LENGTH FOR 36" DOOR
M9900 - 48"	42" LENGTH FOR 48" DOOR

SPECIFICATIONS
<ul style="list-style-type: none"> <li>• <b>Doors:</b> 1-3/4" thick standard.</li> <li>• <b>End cover:</b> Flush mounted beveled "Panic Protector" design.</li> <li>• <b>Strike:</b> Roller strike.</li> <li>• <b>Rail Assembly:</b> Extruded Aluminum, 32D finish.</li> <li>• <b>Dead latch Bolt:</b> Stainless Steel 3/4" throw.</li> <li>• <b>Dead latch Bolt:</b> Stainless Steel 5/8".</li> <li>• <b>Dogging feature:</b> Allen Key (M9900)</li> <li>• <b>UL listed:</b> For "Panic Hardware" and Fire Rated Model 3 hour fire doors up to 38" x 86".</li> <li>• <b>ANSI:</b> ANSI 156.3 (2001), requirements for Grade 1.</li> <li>• <b>3 Hour Fire Rating</b></li> <li>• <b>Finish:</b> 32D</li> </ul>

<ul style="list-style-type: none"> <li>• <b>EXTRUSION HEAVY GAGE, 32D FINISH</b></li> <li>• <b>PANIC PROTECTOR™ END CAP</b></li> <li>• <b>LIFETIME MECHANICAL WARRANTY</b></li> <li>• <b>EASY INSTALLATION, ECONOMICAL</b></li> </ul>
---

# SERIES M9900 VR - EXIT DEVICE

EXIT DEVICES

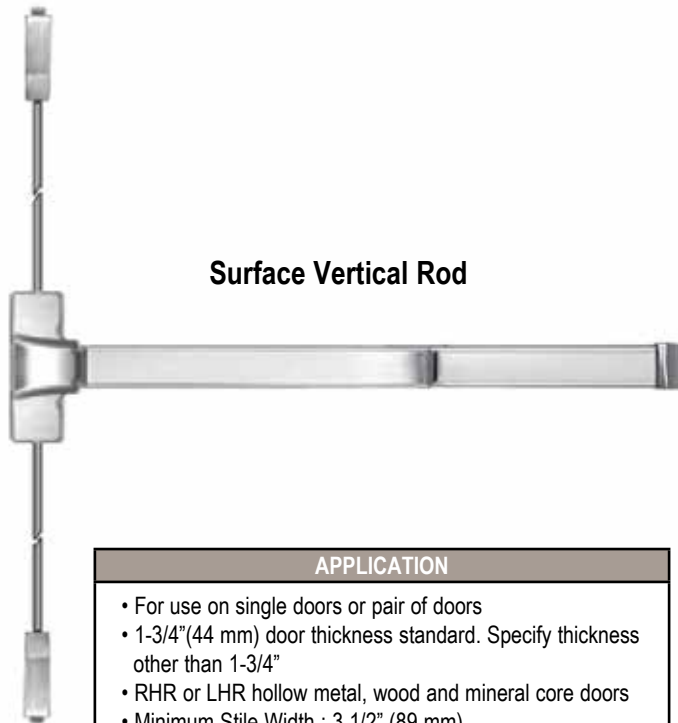

Surface Vertical Rod


APPLICATION
<ul style="list-style-type: none"> <li>• For use on single doors or pair of doors</li> <li>• 1-3/4"(44 mm) door thickness standard. Specify thickness other than 1-3/4"</li> <li>• RHR or LHR hollow metal, wood and mineral core doors</li> <li>• Minimum Stile Width : 3 1/2" (89 mm)</li> </ul>

<b>32D FINISH</b>
-------------------

MARKS #	FUNCTION
M9900 VR	Rim Panic Vertical Rod
M9900F VR	Fire Rated Rim Panic Vertical Rod
M9900 - 48 VR	Rim Panic Vertical Rod - 48"
M9900F - 48 VR	Fire Rated Rim Panic Vertical Rod - 48"

SPECIFICATIONS
<p><b>Device Head Cover:</b> Zinc alloy or stainless steel  <b>Chassis:</b> Steel, plated  <b>Mechanism Housing:</b> Extruded aluminum  <b>Push Bar Base:</b> Extruded aluminum  <b>Touch Plate:</b> Stainless steel  <b>End Cap:</b> Stainless steel  <b>Top Latch:</b> Stainless steel 37/64" (14.8mm)  <b>Top Strike:</b> Included  <b>Bottom Latch:</b> Stainless steel 37/64" (14.8mm)  <b>Bottom Strike:</b> Included  <b>Latch Case Covers:</b> Steel, stainless steel or brass  <b>Vertical Rods:</b> Aluminum tube  <b>Hand:</b> Non-handed  <b>Mounting:</b> Machine screws standard. Sex bolts optional. Order "SNB" for wood or unreinforced metal doors  <b>Dogging:</b> Allen-type key furnished  <b>Finish:</b> 32D  <b>Outside Trim:</b> Order separately  <b>Standard height:</b> For 7'0" doors  <b>UL Listed:</b> ANSI/BHMA Grade1 Panic Exit Hardware, 3-Hour Fire Rating</p>

# SERIES M9900 - EXTERIOR TRIM

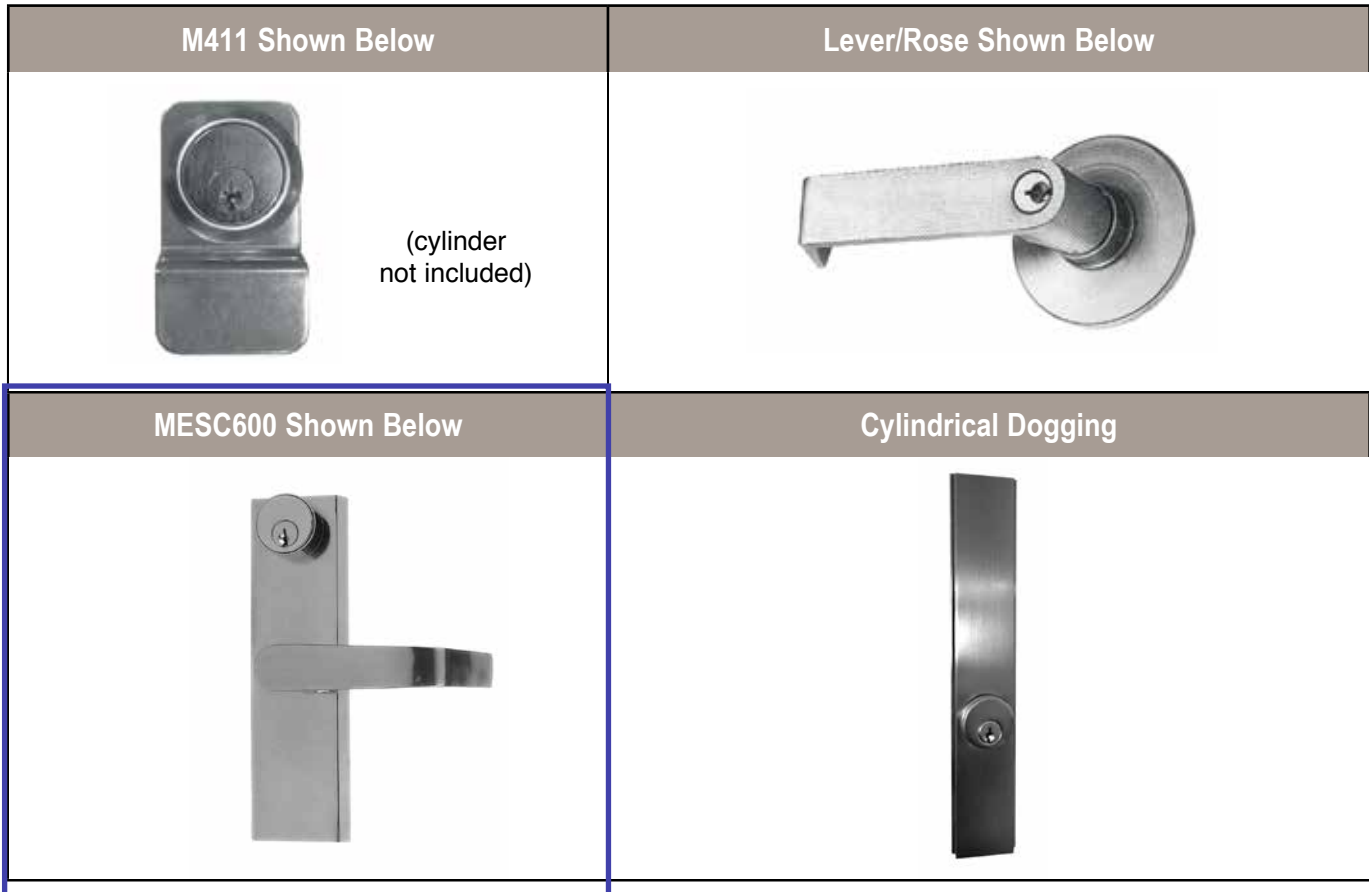





MARKS #	FUNCTION
M411	Finger Pill - no cylinder
MLHL-650A	Lever / Rose Trim Entry
MLHL680F	Lever / Rose Trim Storeroom
MLHL-600N	Lever / Rose Trim Passage
MLHL-600DT	Lever / Rose Trim Dummy Trim
MESC950AF/32D	Lever / Escutcheon Trim Entry/Storeroom
MESC950N/32D	Lever / Escutcheon Trim Passage
MESC950DT/32D	Lever / Escutcheon Trim Dummy Trim
M9901	Cylindrical Dogging / 36 inch Panic Device
M9902	Cylindrical Dogging / 48 inch Panic Device


ENTRY LEVER TRIM
<ul style="list-style-type: none"> <li>• Standard Marks "C" Keyway KNK cylinder for panic device.</li> <li>• Cylinder locks or unlocks lever, rigid when locked; when unlocked retracts latch bolt.</li> <li>• Marks 26D Finish / Standard 1-3/4" Door Thickness</li> <li>• IC Prep Code G1, Less Cylinder G3</li> </ul>
Escutcheon Lever Design
<ul style="list-style-type: none"> <li>• Thru bolt design</li> <li>• Non Handed design. Easily field reversible.</li> <li>• Marks 32D Finish / Standard 1-3/4" Door Thickness</li> <li>• Standard Marks "C" Keyway 1-1/4" Mortise cylinder with special cam</li> <li>• IC Prep Code G1</li> <li>• Less Cylinder G3</li> </ul>

## CAMS & TAILPIECES

### MORTISE CYLINDER CAMS

M9907		MESC600A
M9908		MESC600F
M9909		MESC600A IC CORE HOUSING
M9910		MESC600A IC CORE HOUSING

### KNK CYLINDER TAILPIECES

M9903		MLHL650A - CLIP ON
F1903.SCH		MLHL650F - SCREW CAP
M9984		MLHL650A or F - IC CORE 627 PIN